



Style
TRACK
High Style, Low Cost

Highly Styled, Low Cost Serpentine Drive

Installation Instructions

Chevy LT-1

Kit #20970 (Alternator Only)

#20975 (Alternator and Power Steering)

#20980 (Alternator and A/C)

#20985 (Alternator, A/C and Power Steering)



Included Parts List

Alternator Bracket P/N 20971

- 1 - 20971-A.....Alternator Bracket
- 4 - S248 $\frac{3}{8}$ x 1" SHCS
- 1 - S270 $\frac{3}{8}$ x $3\frac{1}{2}$ SHCS
- 1 - S551M8 x 25 mm
- 1 - 20971-B.....Rear Support
- 1 - 20971-C.....Rear Support Tube
- 1 - S450Adjustment screw
- 1 - 744.....Idler
- 1 - S322 $\frac{3}{8}$ x $1\frac{1}{2}$ Hex Bolt
- 1 - S666 $\frac{3}{8}$ Washer
- 2 - S766 $\frac{3}{8}$ -16 Stainless Threaded Studs
- 2 - S341 $\frac{3}{8}$ -16 Studs

A/C Bracket P/N 20972

- 1 - 20972-A.....A/C Bracket
- 2 - S248 $\frac{3}{8}$ x 1" SHCS
- 2 - S551M8 x 25 MM SHCS
- 1 - 20972-B.....Rear A/C Support
- 1 - S256 $\frac{3}{8}$ x 2" SHCS
- 1 - AC3-1.350.....Spacer
- 1 - S150 $\frac{5}{16}$ x $1\frac{1}{2}$ " SHCS
- 1 - S616 $\frac{5}{16}$ Lock nut
- 1 - 744.....Idler Pulley
- 1 - S322 $\frac{3}{8}$ x $1\frac{1}{2}$ Hex Bolt
- 1 - S666 $\frac{3}{8}$ Washer
- 2 - S766 $\frac{3}{8}$ - 16 Stainless Spacers
- 2 - S341 $\frac{3}{8}$ - 16 Studs

Power Steering Bracket P/N 20973

- 1 - 20973-A.....Power Steering Bracket
- 2 - S144 $\frac{5}{16}$ x $\frac{7}{8}$ " SHCS
- 2 - S551M8 x 25mm SHCS
- 1 - 337-AWater pump Center Cover
(Kit 20980 and 20985with A/C)
- 1 - 338-A.....Water Pump Center Cover
(Kits 20970 and 20975 without A/C)
- 6 - S501M6 x 12 mm SHCS
- 1 - S730O-Ring Rear Seal for Covers

Thermostat Relocator Bracket P/N 20974

- 1 - 20974-A.....Thermostat Relocator Bracket Body
- 2 - S500M6-1.0 x 25mm SHCS

Pulleys

- 1 - 394.....A/C Cover
- 1 - 221.....Alt Fan
- 1 - 208.....Alt Pulley
- 1 - 307.....Alternator Pulley Cover
- 1 - 651.....P/S Pulley with 601 Hub

Accessories

- 1 - P315P/S unit Rem Style
- 1 - P412A/C unit
- 1 - P572Alt. Unit
- 1 - P417A/C line kit
- 1 - P109Corvette Water pump

CRANK HUB NOT SOLD IN KITS

- 1 - 349-A.....Vette Crank Spacer Hub
- 1 - 340-A.....Vette Crank Pulley Cover
- 3 - S370 $\frac{7}{16}$ x $4\frac{1}{2}$ SHCS
- 1 - 348-A.....Camaro Crank Spacer hub
- 1 - 341-A.....Camaro Crank Pulley Cover
- 3 - S370 $\frac{7}{16}$ x $4\frac{1}{2}$ SHCS
- 3 - S315 $\frac{3}{8}$ x $\frac{1}{2}$ " Button Head Bolts

Required Tools and Materials

RTV Silicone

Loc-Tite® Thread Locker

Anti-seize Compound

Gasket Scraper, Steel Wool or Sandpaper to clean gasket surfaces

$\frac{3}{16}$ " Allen Head Driver

$\frac{5}{16}$ " Allen Head Driver

$\frac{1}{4}$ " Allen Head Driver

6mm Allen Head Driver

$\frac{5}{8}$ " Combo Wrench

$\frac{9}{16}$ " Combo Wrench

$1\frac{1}{16}$ " Combo Wrench

$\frac{3}{4}$ " Combo Wrench

Socket Wrench & Extension

10mm 12pt. socket

12mm 12pt. socket

Serpentine Belt

47 $\frac{1}{2}$ " #20970 Alt. Only

54 $\frac{1}{2}$ " #20975 Alt. and P/S

71 $\frac{1}{2}$ " #20980 Alt. and A/C

78 $\frac{1}{2}$ " #20985 Alt., A/C and P/S



Tech Support 1-888-729-9070

Preparing to Install

- Disconnect the battery to prevent accidental engagement of starter motor.
- Drain coolant from system
- If your A/C is intact and charged it must be evacuated. This is best done by a professional garage with proper recycling equipment
- Remove the existing alternator, air conditioning compressor and associated brackets.
- Remove all pulleys and water pump.
- Remove all traces of old gasket and sealer with gasket scraper and steel wool pad.
- Clean threads in block by chasing with appropriate thread chasers.

Installing the Kit


Photo-1 Install Crank Pulley Adapter hub (349-A) or (348-A) Depending on the Dampener for Camaro or Corvette. Use the 3 Provided $\frac{7}{16}$ x $4\frac{1}{2}$ " SHCS (S370).



Photo-3 Ensure the sealing face of the coolant outlets are clean, flat and free of old gasket material. Apply a small amount of RTV silicone to one end of each mounting stud to prevent coolant seepage. Install the (4) $4\frac{1}{2}$ " mounting studs (S341) slide waterpump gaskets In place and install the Corvette Water pump (P109) and secure with (4) $\frac{3}{8}$ " Threaded Stainless Spacers (S766) As Shown.



Photo-2 Install the Crank Pulley Cover (340-A) or (341-A) by first Tapping 3 of the 5/16 dampener holes with a $\frac{3}{8}$ -16 tap and use the (3) $\frac{3}{8}$ x $\frac{1}{2}$ " Button head screws (S315) to secure.

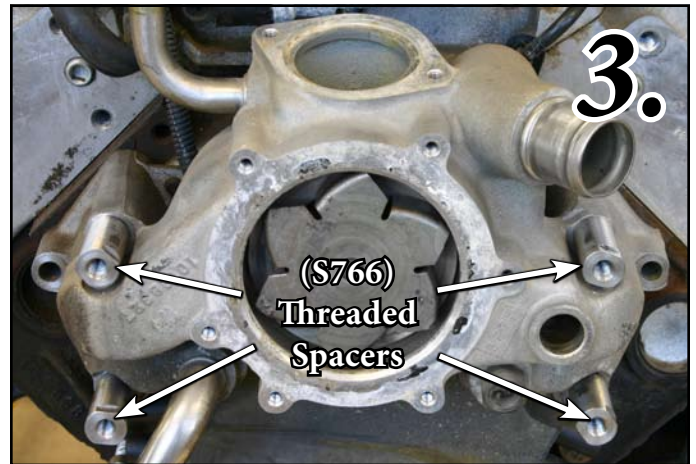

NOTE: For non-A/C kits 20970 and 20975, skip instructions 4, 5 and 6.

Photo-4 Install the A/C Rear Support Bracket (20972-B) Using a (AC3-1.350) Long Spacer Between the Head and the bracket and use a $\frac{3}{8}$ x 2" SHCS (S256) in the Slot of the bracket.

Photo-5 Install the Front Main A/C Bracket (20972-A) to the Water pump with (2) $\frac{3}{8}$ x 1" SHCS (S248).

Install the Front Main Alternator Bracket (20971-A) to the water pump using (2) $\frac{3}{8}$ x 1" SHCS (S248) as shown in **Photo 5**.

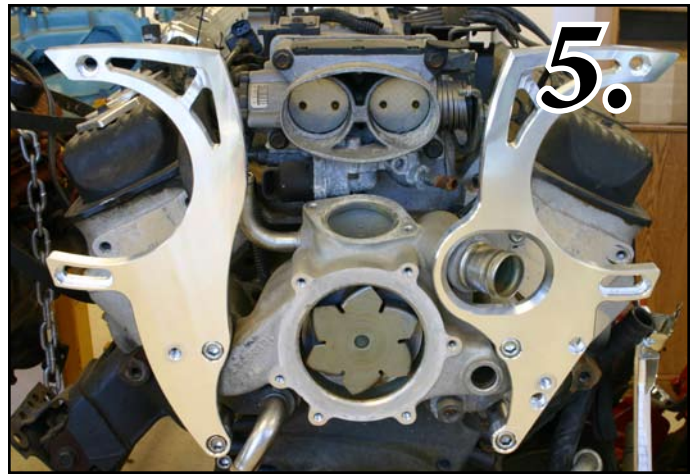


Photo-6 Install the A/C unit (P412) to the main bracket with (2) M8 x 25mm SHCS.(S551) Tie the Rear A/C ear to the Rear Support Bracket with the $\frac{5}{16}$ x 1 $\frac{1}{2}$ " SHCS (S150) and use a $\frac{5}{16}$ Lock Nut (S616).

Photo-7 Install the rear Alternator Support and Rear Support Tube (20971-B) and (20971-C) by bolting the two parts together with a $\frac{3}{8}$ x 1" SHCS (S248) and mount to the head with a $\frac{3}{8}$ x 1" SHCS (S248). In the front of the aluminum tube install the (S450) Threaded Adjustment Screw.

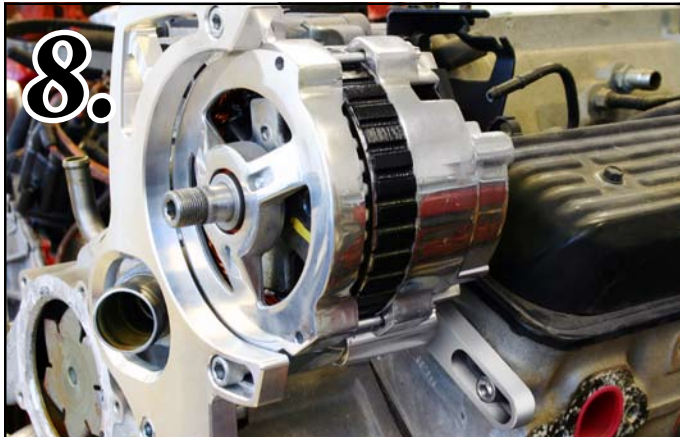


Photo-8 Install the Alternator (P572) using (1) M8 x 25mm SHCS (S551) in the top mounting hole, and a $\frac{3}{8}$ x 3 $\frac{1}{2}$ " SHCS (S270) in the lower slotted hole lining up with the rear Alternator Rear Support. Use the (S450) Threaded Adjustment Screw to take up any slack before tightening bolt.

Photo-9 Install the (2) Idler Pulleys (744) using (2) $\frac{3}{8}$ Washers (666) and (2) $\frac{3}{8}$ x 1 $\frac{1}{2}$ " Hex Head Bolt (S322) To the A/C and Alternator Brackets. (Non A/C kits will use alternator bracket idler only)



Photo-10 Install the Center Water Pump Cover (337-A) using the (6) M6 x 12mm SHCS (S501) and the O-Ring (S730) to the rear of the cover as a replacement seal.

Photo-11 *NOTE: For non-A/C kits 20970 and 20975* Install Center Water Pump Cover (338-A). using the (6) M6 x 12mm SHCS (S501) and the O-Ring (S370) to the rear of the cover as a replacement seal. (*This cover comes with a pre-installed idler for used with kits without A/C*)


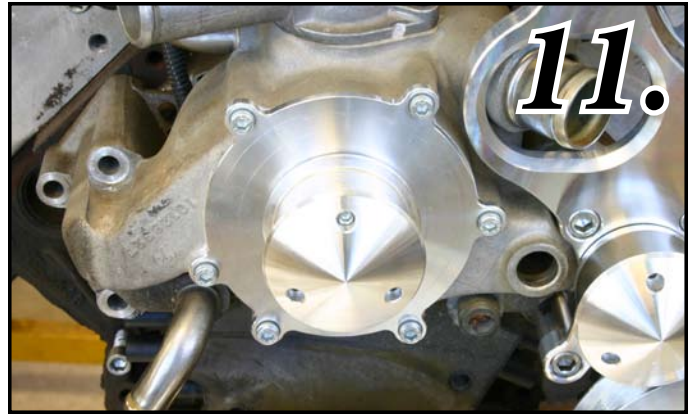


Photo-12 Install the Thermostat Relocator (20974), this bottom view shows a small notch in the thermostat bolt holes, use the relocator as a guide and drill a notch in the thermostat housing for bolt hole clearance.

Photo-13 Using a new gasket mount the thermostat

housing in its re clocked position unsing the relocator (20974-A) and (2) M6 x 25mm SHCS (S500) as shown.

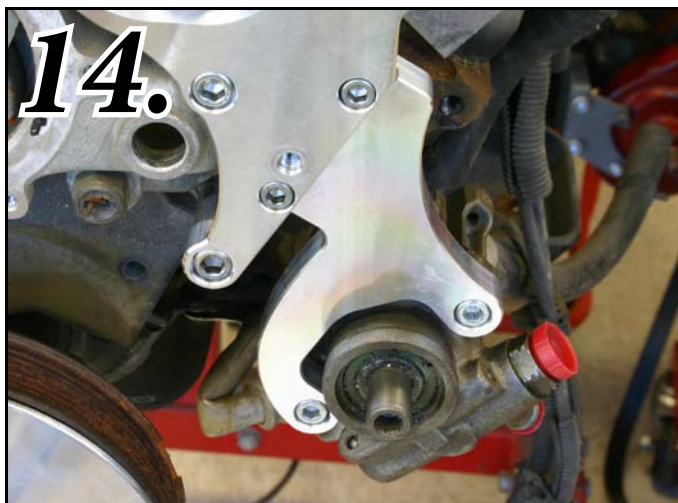

For Kits With Power Steering

Photo-13 Mount the Power Steering Pump (P315) to the Power Steering Bracket (20973-A) using (2) M8 x 25mm SHCS (S551) and mount the Pump/Bracket Assembly to the Alternator bracket using (2) $\frac{5}{16}$ x $\frac{7}{8}$ " SHCS (S144)

Photo-14 Install the Alternator Fan (221) Alternator Pulley (208) and Alternator pulley Cover (307) Install the A/C cover (394) and Power Steering pulley (651) If using P/S . Install the (2) Idler Covers (302).

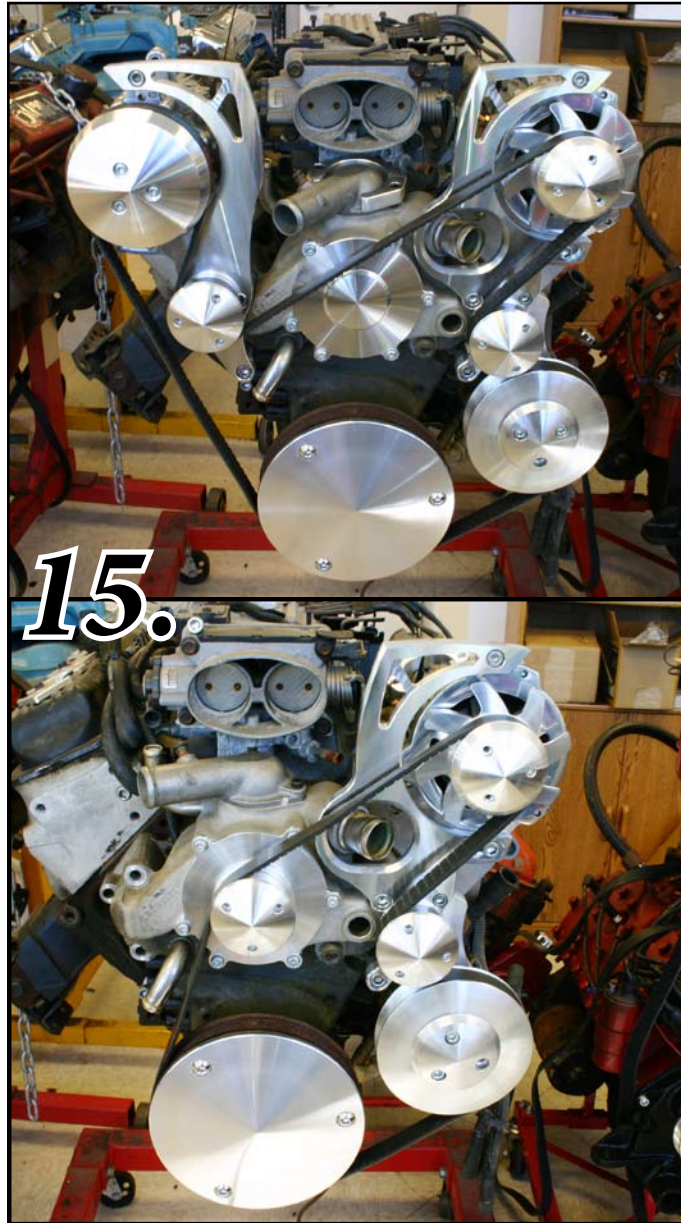


Photo-15 Tilt Alternator and A/C units inward at the lower slots and install the Belt, 71½" for kit 20980 and 78½" for kit 20985 (Kits with A/C) Move the A/C to the outward position and lock in place by tightening the mounting bolts. Tighten the belt to proper tension by pulling the lower Alternator mounting outward and tighten Alternator mounting bolts.

Use a 47½" belt for kit 20970 (Alt. Only Kit).

Use a 54½" belt for kit 20975 (Alternator and P/S), belt will bypass power steering pulley but will still use alternator bracket mounted idler.

Check and tighten all bracket bolts and alternator and A/C lower mounting bolts, turn engine over once by hand to check for any belt rubbing and proper belt alignment. Run engine three minutes and check belt tension again.

Final Assembly

If you are going to be installing your air conditioning hoses and charging the system at this time, remove the cover plate on top of the compressor body. Install the (P417) A/C adapter lines, hoses and connect clutch wire and charge system.

Important: If you are NOT installing hoses and charging the system at this time, leave cover plate on compressor. Do not connect the clutch wire or apply power to clutch wire without the hoses connected and the system charged – *Serious damage will occur to compressor.*

LIMITED WARRANTY

March Performance warrants to the original retail purchaser that for a period of ninety (90) days from the date of purchase, March Performance will repair or replace, at their option, any Product, which is found to be defective in material or workmanship.

Exclusions from Warranty Coverage

March Performance does not warrant any Product that is damaged from abuse, misuse or misapplication or not used for its intended purposes.

This Limited Warranty does not cover or apply to any damage or loss sustained to the engine or any other parts which may have been caused by the defective Product and does not cover or apply to any personal injury, labor charges or any other incidental costs for damages caused by the defective Product. THIS IS THE ONLY EXPRESS WARRANTY GIVEN WITH RESPECT TO YOUR PRODUCT. ALL OTHER EXPRESS WARRANTIES, GUARANTEES, OR STATEMENTS REGARDING THE PRODUCT, WHETHER WRITTEN OR VERBAL, ARE HEREBY DEEMED NULL AND VOID AND OF NO EFFECT.

Normal wear and tear and damage to the Product not caused by March Performance are also excluded from this Warranty.

DISCLAIMER OF OTHER WARRANTIES

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY WHETHER OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTY, SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY WILL LAST SO THAT THE PRECEDING LIMITATION MAY NOT APPLY TO YOU.

Limitation on Remedies

REPAIR OR REPLACEMENT AS PROVIDED IN THIS WARRANTY IS YOUR EXCLUSIVE REMEDY. MARCH PERFORMANCE SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THE PRODUCT. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OF CONSEQUENTIAL DAMAGES SO THE PROCEEDING LIMITATIO OR EXCLUSIONS MAY NOT APPLY TO YOU. YOU HAVE NO RECOURSE OR REMEDY FOR DAMAGE OR DEFECT CAUSED BY MISUSE, ABUSE OR NEGLIGENCE.

THIS WARRANTY GIVES YOU SPECIFIC RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH MAY VARY FROM STATE TO STATE.

Your Responsibilities:

- 1. Use and install the Product only for its intended purpose.
2. To avail yourself of this Limited Warranty, return the Product with a copy of the paid receipt, postage paid to: MARCH PERFORMANCE 16160 PERFORMANCE WAY NAPLES, FL 34110
3. When returning the Product, you must follow the directions set forth on the Warranty/Return Form on the reverse side of this Limited Warranty. If you no longer have the Warranty/Return Form, one may be obtained by contacting March Performance during normal business hours at: (888) 729-9070.
4. Shipping and/or transportation costs returning the Product to March Performance and any damage caused during shipping are your responsibility. March Performance will pay for shipping and/or transportation costs incurred in returning the Product to you.

LIMITED WARRANTY WARRANTY/RETURNS FORM

No product mounted is considered for credit unless it is a manufacturer defect.

All products returned for any reason must reference an authorization number (RGA). The RGA number is obtained by calling place of purchase during normal business hours. Any product returned without the RGA# written on the return package next to the return shipping label will be refused.

All returns must ship via UPS and be properly packaged in the original carton. Return freight charges are the responsibility of the customer unless the product was shipped in error.

March product returned after (1) year from date of purchase will not be accepted unless it is found to be a manufacturer defect. The customer must include a written statement describing the alleged product defect. The complete Limited Warranty is set forth on the reverse side.

- 100% credit issued on manufacturer defects
20% return fee on all reshelvable product
30% return fee on all repairable product

NO CREDIT WILL BE ISSUED ON RETURNED PRODUCT BEYOND REPAIR

March Performance thoroughly inspects all returns. It is the sole discretion of March Performance in determining the condition of all returned merchandise.

To receive replacements at no charge the original product must first be received and inspected by March Performance for determination. Immediate replacements may be purchased and later credited upon inspection determination.

Please Complete the Information below, detach and include with returned product.

Form fields for RGA#, CT#, Issued by, Date, Purchaser's Name, Phone, Address, Purchased Directly Through, Invoice#, Product ID, Invoice Date, Reason.

** MOUNTED PRODUCTS ARE NONREFUNDABLE **